



## Small Signal Schottky Rectifier




**SOT-23**

### Features


- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Low Forward Voltage Schottky Rectifier
- $V_{RRM}$  30V
- $I_{FAV}$  200mA
- Part no. with suffix "Q" means AEC-Q101 qualified

### Mechanical Data


- **Case:** SOT-23
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102




**BAT54HQ**



**BAT54AHQ**



**BAT54CHQ**



**BAT54SHQ**

### ■ Maximum Ratings ( $T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	CONDITIONS	VALUE
Repetitive Peak Reverse Voltage	$V_{RRM}$	V		30
Average Forward Current	$I_{FAV}$	mA		200
Peak Forward Surge Current	$I_{FSM}$	A	square wave $t_p < 10\text{ms}$	3
Power Dissipation	$P_{tot}$	mW		250
Thermal Resistance Junction to Ambient	$R_{thJA}$	$^\circ\text{C}/\text{W}$		500
Junction Temperature	$T_j$	$^\circ\text{C}$		-55 to +150
Storage Temperature Range	$T_{stg}$	$^\circ\text{C}$		-55 to +150



# BAT54HQ&BAT54AHQ&BAT54CHQ&BAT54SHQ

## ■ Electrical Characteristics (T<sub>a</sub>=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	CONDITIONS	MIN	MAX
Forward Voltage	V <sub>F</sub>	V	I <sub>F</sub> =0.1mA		0.24
			I <sub>F</sub> =1mA		0.32
			I <sub>F</sub> =10mA		0.4
			I <sub>F</sub> =30mA		0.5
			I <sub>F</sub> =100mA		1
Reverse Current	I <sub>R</sub>	μA	V <sub>R</sub> =25V		2
Breakdown Voltage	V <sub>BR</sub>	V	I <sub>R</sub> =10μA	35	
Junction Capacitance	C <sub>J</sub>	pF	V <sub>R</sub> =1V, f=1MHZ		10
Reverse Recovery Time	t <sub>rr</sub>	ns	I <sub>F</sub> =I <sub>R</sub> =10mA, I <sub>rr</sub> =1mA, R <sub>L</sub> =100Ω		5

## ■ Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BAT54HQ&BAT54AHQ&BAT54CHQ&BAT54SHQ	F2	Approximate 0.01	3000	30000	120000	7" reel



## ■ Characteristics (Typical)

Fig.1:  $P_D-T_A$

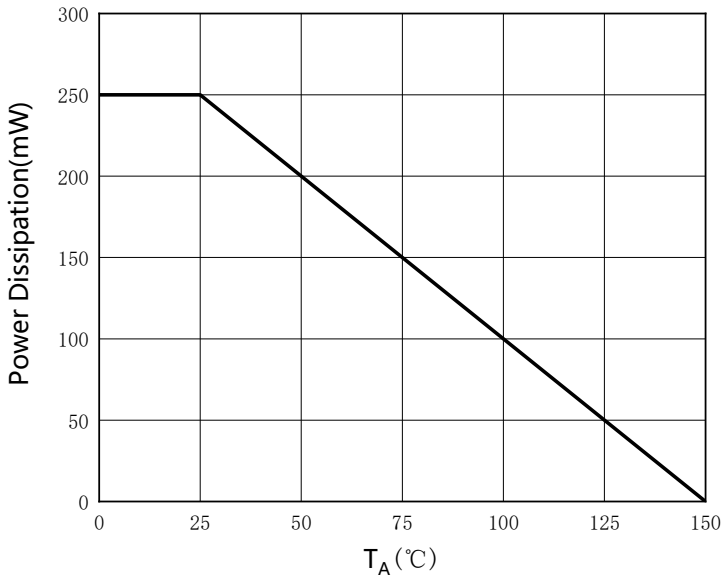


Fig.2: Capacitance Characteristics

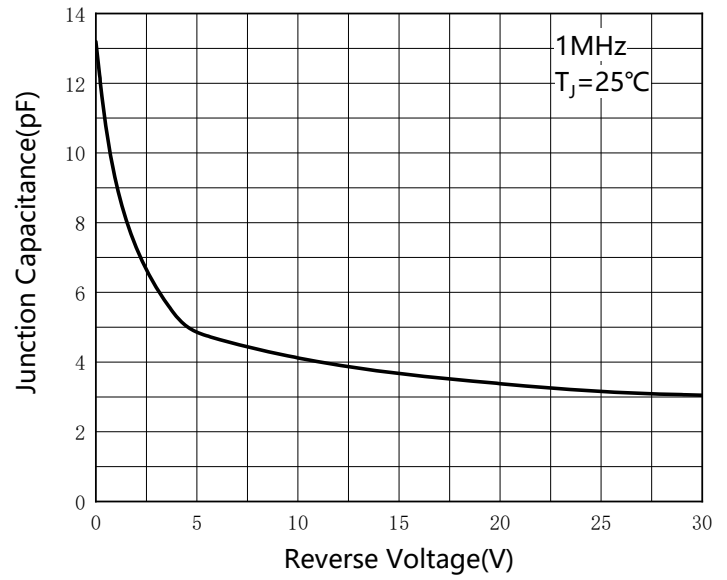


Fig.3: Forward Characteristics


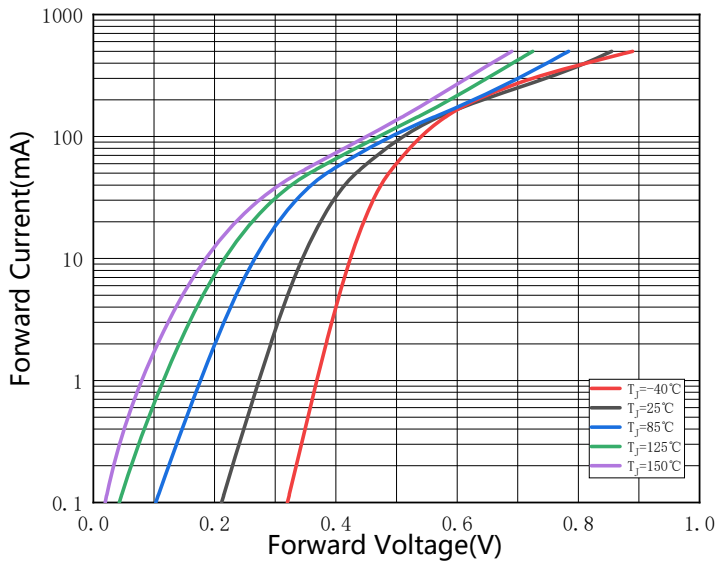



Fig.4: Reverse Characteristics



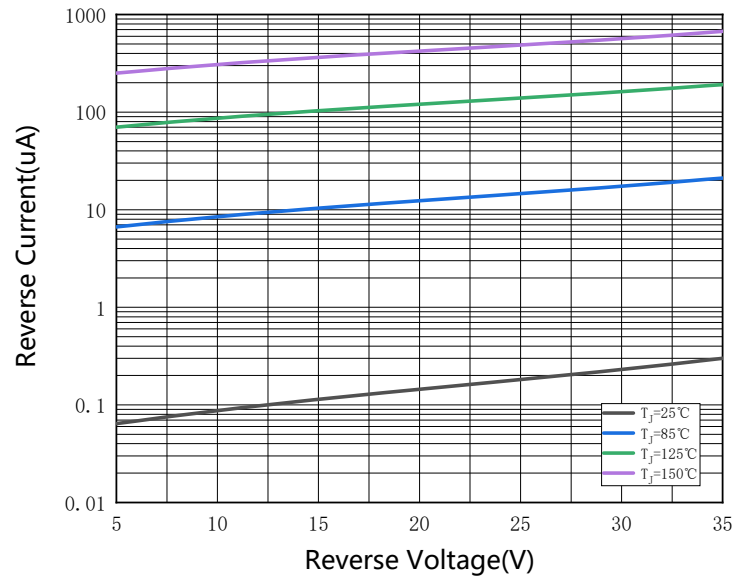

# BAT54HQ&BAT54AHQ&BAT54CHQ&BAT54SHQ


## ■ Outline Dimensions

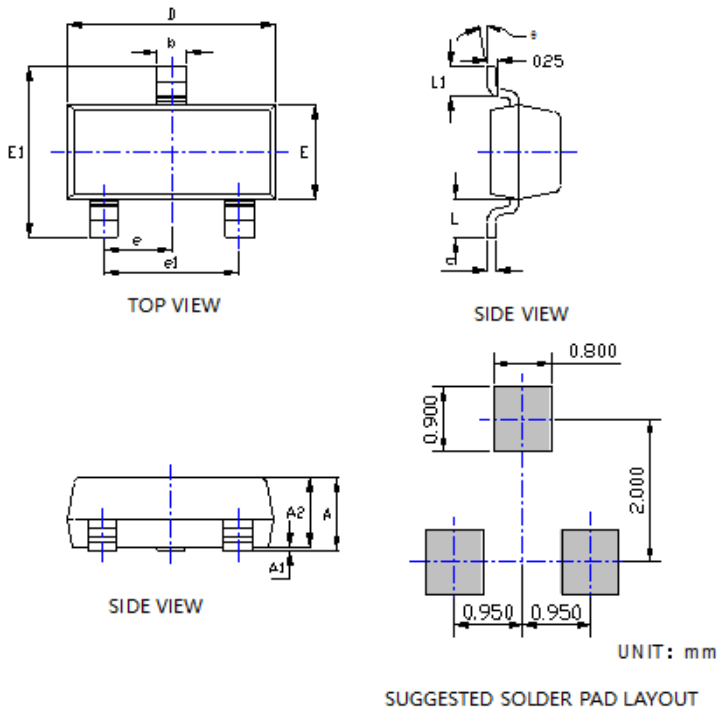

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.020	0.300	0.500
θ	0°	8°	0°	8°

NOTE:  
 1. PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.  
 2. TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.  
 3. THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.

## ■ Marking Information

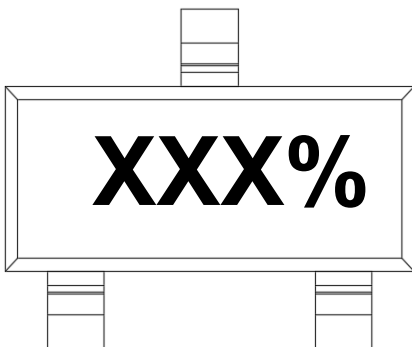

PN	Marking Code
BAT54HQ	KL1%
BAT54AHQ	KL2%
BAT54CHQ	KL3%
BAT54SHQ	KL4%

Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. Body color: Black
4. XXX% is Marking Code (%=placeholder for date code)

\*Date Code vary depending upon production date.



## Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, life-sustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.